



Quadro Centrifugal Recessed Fans


The Quadro recessed range is a stylish wall or ceiling mounted range of centrifugal fans (kit required for ceiling mounting). Three sizes Micro, Medio or Super to comply with the requirements of bathrooms, toilets, kitchens or utility rooms. Air extraction from four sides of the Fan has an especially attractive design. Splash proof IPX4. Can be ducted 10m.

TECHNICAL SPECIFICATIONS


- 100mm diameter spigot standard
- 11 models available: 9 with or without timer and incorporated humidistat, 2 high-efficiency EC-DC brushless motor.
- Low Carbon/Low Watt models available
- 2 Speed
- Simple to install just 3 screws, one for safety and two for fastening.
- Option of vertical or horizontal extract points
- Wall or ceiling mounted (kit required for ceiling mounting)
- Fitted with washable filter easy to maintain.
- Low noise
- Low power consumption yet excellent airflow.
- Can be ducted up to 10m
- IPX4 splash proof protection on all models.
- IMQ data label ensures data and performance is third party certified.
- Conforms to international standards: CEI EN 60335-2-80, CEI EN 60529 (code IP) and CEI 107-53/1986
- Eco-Friendly: Recyclable materials have been used and the "Design for Disassembly" technique has been followed (2002/96/EC-WEE)



Pressure/Performance Curves

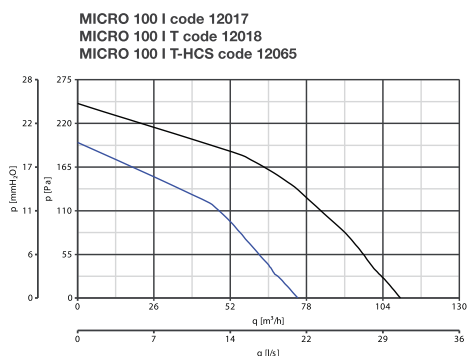


12017, 12018, 12065

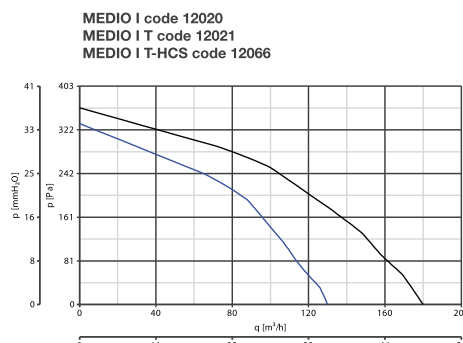


12020, 12021, 12066

SPEED
— max
— min

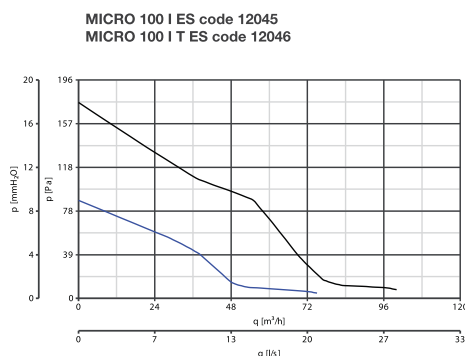

12045, 12046

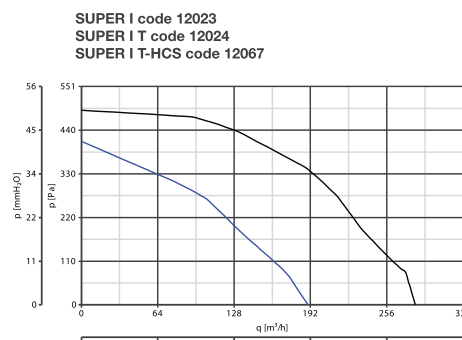

12023, 12024, 12067



Quadro Centrifugal Recessed Fans

The Quadro recessed range is a stylish wall or ceiling mounted range of centrifugal fans (kit required for ceiling mounting). Three sizes Micro, Medio or Super to comply with the requirements of bathrooms, toilets, kitchens or utility rooms. Air extraction from four sides of the Fan has an especially attractive design. Splash proof IPX4. Can be ducted 10m.

Quadro ES Recessed LOW WATT FANS

CODE	DESCRIPTION	BOX QTY
12045 ▲	QUADRO ES MICRO RECESSED FAN (75/100m ³ /h)(21/28l/s) 2-SPEED (8/15watts)	4
12046	QUADRO ES MICRO RECESSED FAN c/w Timer (75/100m ³ /h) (21/28l/s) 2-SPEED (8/15watts)	4



Vort Quadro Range Recessed

CODE	VORT QUADRO RECESSED DUCT FAN 100mm WALL MOUNTING IPX4 2-SPEED	BOX QTY
12017 ▲	QUADRO MICRO RECESSED FAN (75/110m ³ /h) (21/31 l/s)	2
12018	QUADRO MICRO RECESSED FAN c/w Timer (75/110m ³ /h) (21/31 l/s)	2
12020 ▲	QUADRO MEDIO RECESSED FAN (130/180m ³ /h) (36/50 l/s)	2
12021	QUADRO MEDIO RECESSED FAN c/w Timer (130/180m ³ /h) (36/50 l/s)	2
12023 ▲	QUADRO SUPER RECESSED FAN (190/280m ³ /h) (53/78 l/s)	2
12024 ▲	QUADRO SUPER RECESSED FAN c/w Timer (190/280m ³ /h) (53/78 l/s)	2

Kit Required for Ceiling Mounting

Quadro Humidity Recessed T-HCS Humidity Control System - Timer

CODE	VORT QUADRO HUMIDITY CONTROL FAN 100mm WALL / CEILING MOUNTING IPX4 2-SPEED	BOX QTY
12065 ▲	QUADRO MICRO Recessed T-HCS Fan (75/110m ³ /h) (21/31 l/s)	2
12066 ▲	QUADRO MEDIO Recessed T-HCS Fan (130/180m ³ /h) (36/50 l/s)	2

CODE	CEILING RECESSED KITS FOR QUADRO RANGE	BOX QTY
22491	CEILING RECESS KIT FOR MICRO FAN	1
22492	CEILING RECESS KIT FOR MEDIO FAN	1
22493	CEILING RECESS KIT FOR SUPER FAN	1

Dimensions (mm)

	A	C	D	E	F	G	H	L	KG
MICRO 100 1	258	34	92	90	64	60	118	26	1,91
MEDIO 1	287	37	97	103	72	69	130	26	2,79
SUPER 1	314	38	120	120	80	81	153	26	4,29

▲ : NON STOCK PRODUCTS SPECIAL ORDER REQUIRED

